


Room panel

Technical specifications

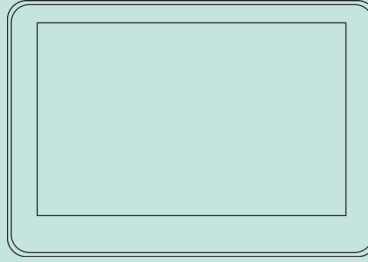

Display	<p>10.1" LCD panel</p> <p>10 points capacitive multi-touch</p> <p>350 nits maximum brightness</p> <p>1280 x 800 panel resolution</p> <p>Viewing angle (H / V): 80 / 80</p> <p>Programmable surround with wall projection</p> <p>LED light</p>
Audio format supported	<p>MP3 up to 320 kbps</p>
Connectivity	<p>Wi-Fi: 802.11 a/b/g/n/ac (supports 2.4 GHz and 5 GHz)</p> <p>Ethernet RJ45: 1000BASE-T, 10/100/1000 Mbps LAN</p> <p>Expansion port (supports physical access control pin / RS485 / GPIO)</p> <p>Built-in 2 W stereo speaker x 1</p>
Supplied accessories	<p>Built-in VESA compatible 75 mm x 75 mm posts</p> <p>Back cover screws x 5 (M3*13 x 3, M3*6 x 2)</p> <p>Flush mount back cover</p> <p>Glass mount sticker x 1</p> <p>Glass mount cover sheet x 1</p>
Power requirements	<p>Input: 100–200 V, 50–60 Hz</p> <p>Output: 12 V, 2 A</p> <p>UL / CB certified power supplies</p> <p>Interchangeable connector system includes US plugs (optional for EU, UK, and AUS plugs)</p> <p>IEEE 802.32 at Power-Over-Ethernet (PoE+)</p>
Environmental	<p>Operating temperature: 0–40 °C / 32–104 °F</p> <p>Humidity: 10 % to 85 % @ 40 °C non-condensing</p>
Dimensions for product & package	<p>Display size (mm): 261 x 181 x 29 (10.28" x 7.12" x 1.14")</p> <p>Display weight (g): 727 (1.6 lbs)</p> <p>Individual package size (mm): 320 x 90 x 255 (12.6" x 0.35" x 10.0")</p> <p>Outer carton size (W x D x H; mm): 480x 280 x 350 (18.9" x 11.0" x 13.8")</p> <p>Units per outer carton: 5</p>
Certifications	<p>CE / FCC / RoHS</p>